

INDUSTRIAL DIESEL ENGINE


Kubota Super Mini Series (2-Cylinder)

Z602-E4B




Rated Power

12.5 kW @ 3600 rpm

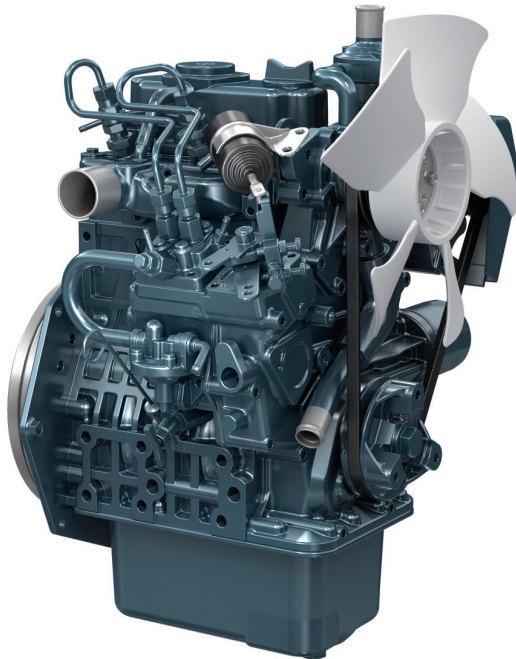

Photograph may show non-standard equipment.

Performance Curves

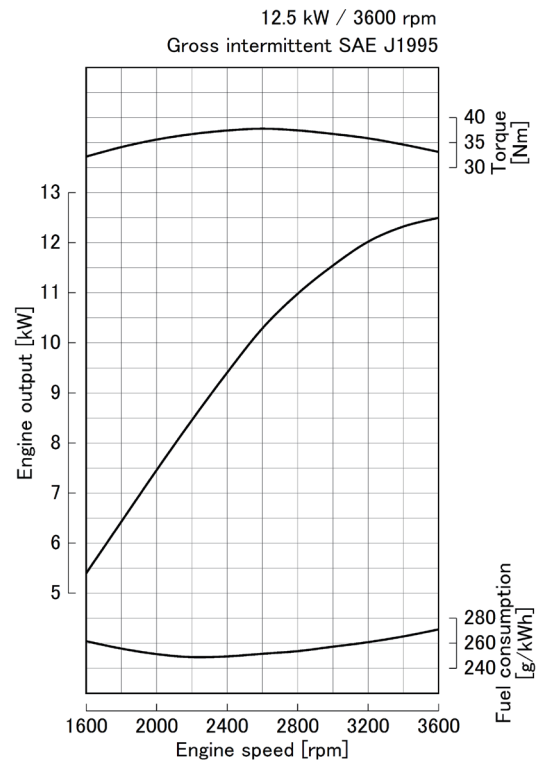

Features and Benefits

Emissions

The Kubota Super Mini Series features compact multi-cylinder liquid cooled industrial diesel engines which comply with EPA / CARB Tier 4 emissions regulations.

Durable Power

The Kubota Z602 engine is a high-power density engine that delivers maximum output using a 2-cylinder configuration.

By expanding the bore and stroke, Kubota has increased engine displacement while maintaining the same footprint as the Z482 engine. The use of an extended shallow oil pan keeps the engine height lower than that of the Z482, providing a compact engine package.

The cooling water passages between the cylinder bores features Kubota's original casting technology as a countermeasure against the heat load caused by high power density, providing both superior endurance and reliable engine performance.

This engine offers a seamless transition from E3 to E4 by maintaining the same level of performance and physical characteristics.

Clean and Quiet Power

Kubota's original E-TVCS (Three Vortex Combustion System) has been further improved for cleaner emissions. The piston recess has been optimized to achieve lower particulate matter (PM) levels at an extremely small size. The half-float valve cover and MoS₂-coated pistons reduce noise levels and decrease vibrations transmitted from the valve area.

